



NaDiaProbes[®] - All-Diamond AFM Probes

AFM Probes Product Catalog

Advanced Diamond Technologies (ADT) is committed to providing the unparalleled attributes of diamond to the Semiconductor, Microscopy, Electrochemical, and Biomedical markets and has developed a roadmap and portfolio of technology leading monolithic diamond probes which enable next generation applications. The ADT NaDiaProbes[®] line delivers exceptional value in long life, high precision, and new usage models unavailable from conventional Si or SiN probes. The ADT process delivers wafer scale production and economically attractive pricing for high volume applications.

Enabling Innovation in: Semiconductor ◆ Microscopy ◆ Electrochemistry ◆ Biomedical



ND-DYI series: Dynamic Mode

Tip:

Shape: Four-sided pyramid
 Height: 5.7 μm (± 0.1)
 Radius: Less than 50 nm
 Material: UNCD (polycrystalline diamond)

Cantilever:

Tip Setback: 9 μm
 Coating: 70 nm (± 10) reflective aluminum coating
 Chip: Pyrex (3.6 x 1.5 x 0.5 mm)
 Curvature: Nominally less than 3 degrees

SKU	Cantilever	Force Constant (N/m)		Frequency (kHz)		Length (μm) (± 5)	Width (μm) (± 2)	Thickness (μm) (± 0.5)
		nominal	range	nominal	range			
ND-DYIRS	1 cantilever/chip	35	25-40	310	150-400	120	33	3



ND-CTI series: Contact Mode


Tip:

Shape: Four-sided pyramid
 Height: 5.7 μm (± 0.1)
 Radius: Less than 50 nm
 Material: UNCD

Cantilever:

Tip Setback: 9 μm
 Coating: 70 nm (± 10) reflective aluminum coating
 Chip: Pyrex (3.6 x 1.5 x 0.5 mm)
 Curvature: Nominally less than 3 degrees

SKU	Cantilever	Force Constant (N/m)		Frequency (kHz)		Length (μm) (± 5)	Width (μm) (± 2)	Thickness (μm) (± 0.2)
		nominal	range	nominal	range			
ND-CTIT1	2 cantilever/chip	1.28	1.00-1.50	48	25-70	200	25	1
		0.46	0.30-0.60	24	12-40	300	41	1
ND-CTIT2	2 cantilever/chip	0.71	0.50-0.95	50	25-75	200	17	1
		0.04	0.02-0.05	23	12-45	300	23	1
ND-CTIR1	3 cantilever/chip	0.35	0.25-0.45	35	20-50	225	30	1
		0.17	0.10-0.25	17	10-25	325	40	1
		0.04	0.02-0.05	12	6-20	425	20	1
ND-CTIR2	3 cantilever/chip	0.23	0.15-0.30	40	20-60	225	20	1
		0.08	0.05-0.10	12	6-20	425	40	1
		0.05	0.03-0.07	8	4-16	500	40	1



ND-CTI series: Contact Mode


Tip:

Shape: Three-sided pyramid
 Height: 5.7 μm (± 0.1)
 Radius: Less than 50 nm
 Material: UNCD

Cantilever:

Tip Setback: 9 μm
 Coating: 70 nm (± 10) reflective aluminum coating
 Chip: Pyrex (3.6 x 1.5 x 0.5 mm)
 Curvature: Nominally less than 3 degrees

SKU	Cantilever	Force Constant (N/m)		Frequency (kHz)		Length (μm) (± 5)	Width (μm) (± 2)	Thickness (μm) (± 0.2)
		nominal	range	nominal	range			
ND-CTIT3	2 cantilever/chip	1.28	1.00-1.50	48	25-70	200	25	1
		0.46	0.30-0.60	24	12-40	300	41	1
ND-CTIT4	2 cantilever/chip	0.71	0.50-0.95	50	25-75	200	17	1
		0.04	0.02-0.05	23	12-45	300	23	1



ND-SSR series: Scanning Spreading Resistance Microscopy

Tip:

Shape: Three-sided pyramid
 Height: 5.7 μm (± 0.1)
 Radius: Less than 50 nm
 Material: Conductive UNCD

Cantilever:

Tip Setback: 9 μm
 Coating: 70 nm (± 10) reflective aluminum coating
 Chip: Pyrex (3.6 x 1.5 x 0.5 mm)
 Curvature: Nominally less than 3 degrees

SKU	Cantilever	Force Constant (N/m)		Frequency (kHz)		Length (μm)	Width (μm)	Thickness (μm)
		nominal	range	nominal	range			
ND-SSCRS	1 cantilever/chip	27	13-35	265	150-355	130	33	2.3
ND-SSCRL	1 cantilever/chip	5.5	4-7	80	50-110	245	42	2.3



ND-DYC series: Dynamic Conductive Mode

Tip:

Shape: Four-sided pyramid
 Height: 5.7 μm (± 0.1)
 Radius: Less than 50 nm
 Material: Conductive UNCD

Cantilever:

Tip Setback: 9 μm
 Coating: 70 nm (± 10) reflective aluminum coating
 Chip: Pyrex (3.6 x 1.5 x 0.5 mm)
 Curvature: Nominally less than 3 degrees

SKU	Cantilever	Force Constant (N/m)		Frequency (kHz)		Length (μm)	Width (μm)	Thickness (μm)
		nominal	range	nominal	range			
ND-DYCRS	1 cantilever/chip	35	25-40	310	150-400	120	33	3



ND-CTC series: Conductive Contact Mode


Tip:


Shape: Four-sided pyramid
 Height: 5.7 μm (± 0.1)
 Radius: Less than 50 nm
 Material: Conductive UNCD

Cantilever:

Tip Setback: 9 μm
 Coating: 70 nm (± 10) reflective aluminum coating
 Chip: Pyrex (3.6 x 1.5 x 0.5 mm)
 Curvature: Nominally less than 3 degrees

SKU	Cantilever	Force Constant (N/m)		Frequency (kHz)		Length (μm)	Width (μm)	Thickness (μm)
		nominal	range	nominal	range			
ND-CTCR1	3 cantilevers/chip	0.35	0.25-0.45	35	20-50	225	30	1
		0.17	0.10-0.25	17	10-25	325	40	1
		0.04	0.02-0.05	12	6-20	425	20	1
ND-CTCR2	3 cantilevers/chip	0.23	0.15-0.30	40	20-60	225	20	1
		0.08	0.05-0.10	12	6-20	425	40	1
		0.05	0.03-0.07	8	4-16	500	40	1
ND-CTCT1	2 cantilevers/chip	1.28	1.00-1.50	48	25-70	200	25	1
		0.46	0.30-0.60	24	12-40	300	41	1
ND-CTCT2	2 cantilevers/chip	0.71	0.50-0.95	50	25-75	200	17	1
		0.04	0.02-0.05	23	12-45	300	23	1

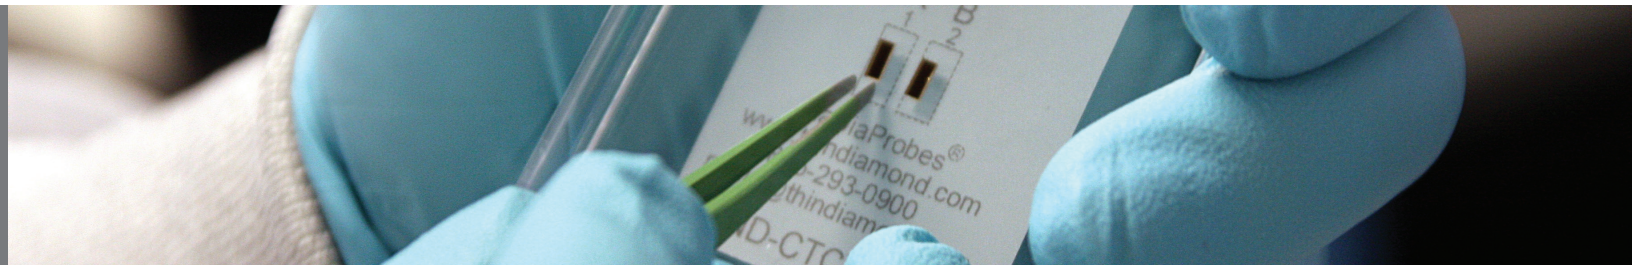



AD-DYI series: Sharp Dynamic Mode


Tip:

Shape: Conical
 Height: 5.7 μm (± 0.1)
 Radius: **Less than 10 nm**
 Material: UNCD

Cantilever:

Tip Setback: 9 μm
 Coating: 70 nm (± 10) reflective aluminum coating
 Chip: Pyrex (3.6 x 1.5 x 0.5 mm)
 Curvature: Nominally less than 3 degrees

SKU	Cantilever	Force Constant (N/m)		Frequency (kHz)		Length (μm)	Width (μm)	Thickness (μm)
		nominal	range	nominal	range	(± 10)	(± 2)	(± 0.4)
AD-DYIRE	1 cantilever/chip	35	30-45	300	150-400	125	33	3



AD-DYC series: Sharp Conductive Dynamic Mode


Tip:

Shape: Conical
 Height: 5.7 μm (± 0.1)
 Radius: **Less than 10 nm**
 Material: Conductive UNCD

Cantilever:

Tip Setback: 9 μm
 Coating: 70 nm (± 10) reflective aluminum coating
 Chip: Pyrex (3.6 x 1.5 x 0.5 mm)
 Curvature: Nominally less than 3 degrees

SKU	Cantilever	Force Constant (N/m)		Frequency (kHz)		Length (μm)	Width (μm)	Thickness (μm)
		nominal	range	nominal	range	(± 10)	(± 2)	(± 0.5)
AD-DYCRS	1 cantilever/chip	35	30-45	300	150-400	125	33	3



AD-CTC series: Sharp Conductive Contact Mode

Tip:

Shape: Conical
 Height: 5.7 μm (± 0.1)
 Radius: **Less than 10 nm**
 Material: Conductive UNCD

Cantilever:

Tip Setback: 9 μm
 Coating: 70 nm (± 10) reflective aluminum coating
 Chip: Pyrex (3.6 x 1.5 x 0.5 mm)
 Curvature: Nominally less than 3 degrees

SKU	Cantilever	Force Constant (N/m)		Frequency (kHz)		Length (μm)	Width (μm)	Thickness (μm)
		nominal	range	nominal	range	(± 10)	(± 2)	(± 0.5)
AD-CTCT1	2 cantilevers/chip	1.28 0.46	1.00-1.50 0.30-0.60	48 24	25-70 12-40	200 300	25 41	1 1
AD-CTCR1	2 cantilevers/chip	0.35 0.17	0.25-0.45 0.10-0.25	35 17	20-50 10-25	225 325	30 40	1 1

Advanced Diamond Technologies, Inc.
 48 East Belmont Drive
 Romeoville, Illinois 60446
 +01 815.293.0900
 www.thindiamond.com
 email: info@thindiamond.com

UNCD is a registered trademark of and the ADT logo, are trademarks of Advanced Diamond Technologies, Inc. Specifications subject to change without notice.

© 2012 Advanced Diamond Technologies, Inc. All rights reserved.

This product is protected by one or more of the following U.S. and foreign patents: 5,969,511; 7,128,889. Additional patents pending. V20121023.1.