

SENSOFAR[®]
METROLOGY



Compact
3D Optical
Surface Profiler


S lynx
Compact 3D Profiler


Compact. Flexible. Powerful.

S lynx is a new non-contact 3D surface profiler designed for use in industry and research. It has been designed as a compact and versatile system. S lynx is able to measure differing textures, structures, roughness and waviness, all across varying surface scales. The S lynx's versatility makes it appropriate for a broad range of high-end surface measurement applications. Ideal performance is guaranteed by Sensofar's proprietary 3-in-1 measurement technology, and complemented by the incredibly intuitive operation of the system with the associated SensoSCAN software.

Applications

- | Automotive
- | Consumer electronics
- | Energy
- | LCD
- | Materials science
- | Microelectronics
- | Micromanufacturing
- | Micropaleontology
- | Optics
- | Tooling
- | Semiconductors
- | Watch manufacturing

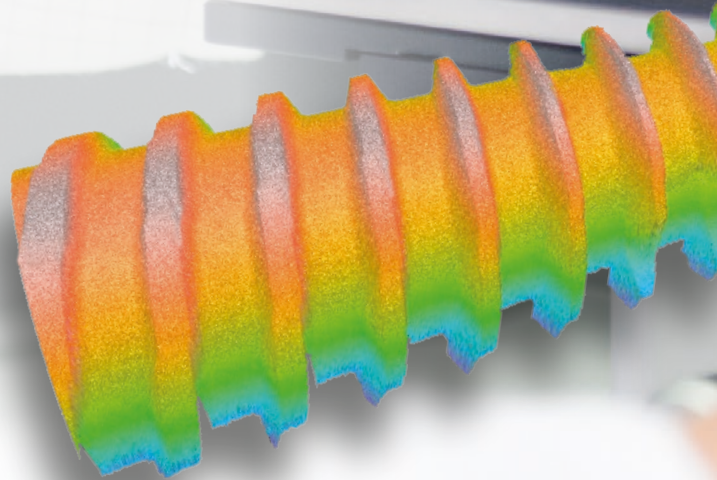




Why 3-in-1 technologies?

Single-technology systems are subject to a lack of versatility. When confronted with measurement tasks that push the boundaries of their physics-based limitations, the only option is to manipulate the measurement parameters to favor the requisite result. However, favoring either speed, or resolution or accuracy usually means sacrificing one or both of the others, and the user is thus confronted with some sort of compromise in the data acquisition.

With Sensofar's 3-in-1 approach – as found in the S line of measurement systems – a single click in software switches the system to the best technique for the task at hand. The 3 measurement techniques found in the S lynx sensor head – confocal, vertical scanning interferometry & focus variation – thus each contribute critically to the versatility of the system, help minimize undesirable compromises in the data acquisition, and together provide Sensofar's class-leading surface measurement performance.

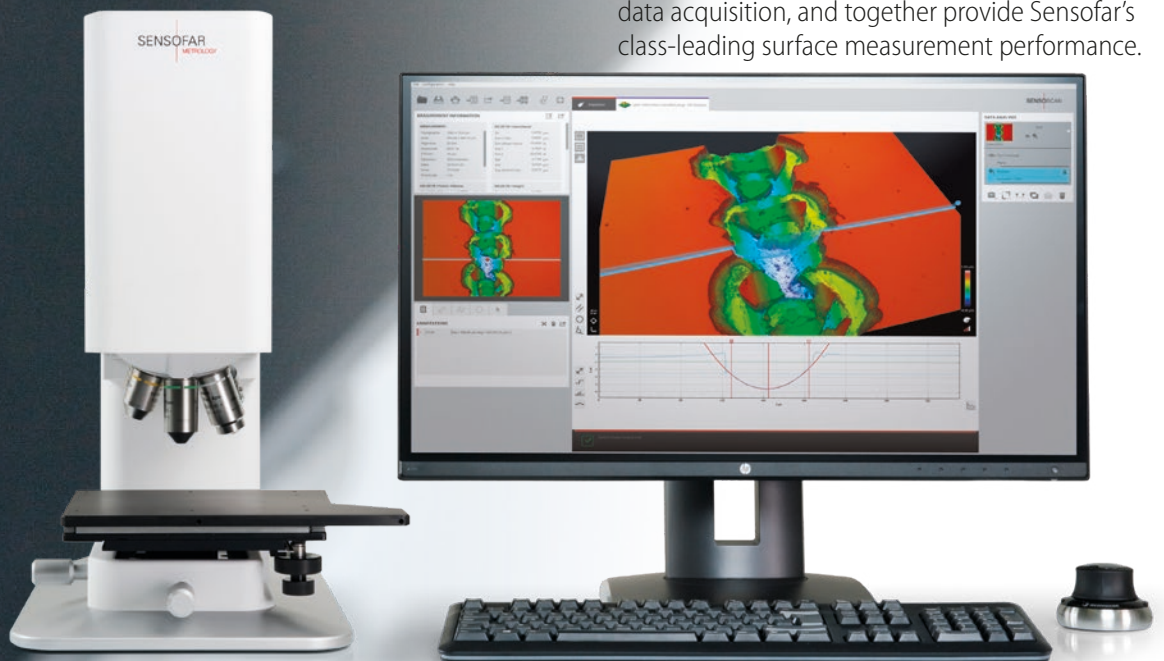

Confocal


Confocal profilers have been developed for measuring smooth to very rough surfaces. Confocal profiling provides the highest lateral resolution that can be achieved by an optical profiler. Thus, spatial sampling can be reduced to 0.01 μm , which is ideal for critical dimension measurements. High NA (0.95) and magnification (150X) objectives are available to measure smooth surfaces with steep local slopes over 70° (for rough surfaces up to 86°). The proprietary confocal algorithms provide the unique vertical repeatability on the nanometer scale.

Interferometry

White-light vertical scanning interferometry (VSI) is a widely used and powerful technique for measuring surface characteristics such as topography or transparent film structure. It is best suited for measuring smooth to moderately rough surfaces, and provides nanometer vertical resolution regardless of the objective's NA or magnification.


Focus Variation

Focus Variation is an optical technology that has been developed for measuring the shape of large rough surfaces. This technology is based on Sensofar's extensive expertise in the field of combined confocal and interferometric 3D measurements, and is specifically designed to complement confocal measurements at low magnification. Highlights of the technology include high slope surfaces (up to 86°), highest measurement speeds (mm/s) and large vertical range. This combination of measurement capabilities is mainly used for tooling applications.

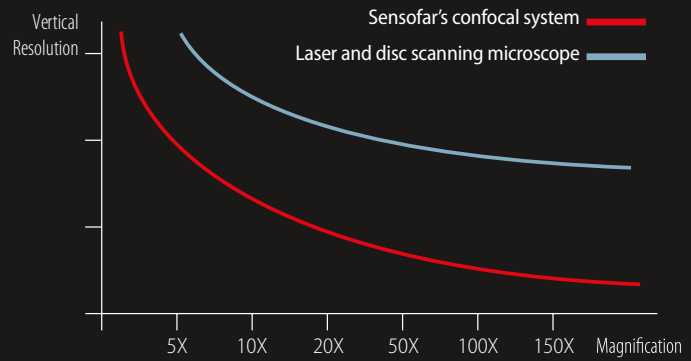

Confocal with no moving parts

The confocal scanning technique implemented in Sensofar's systems utilizes a patented microdisplay scanning technology. The microdisplay is based on ferroelectric liquid crystal on silicon (FLCoS) technology, creating a rapidly switching device with no moving parts that makes the scanning of confocal images fast, reliable and accurate. Due to the microdisplay and the associated algorithms, Sensofar's confocal technique yields a class-leading vertical resolution, better than other confocal approaches and even better than laser scanning confocal systems. All without filtering the data.

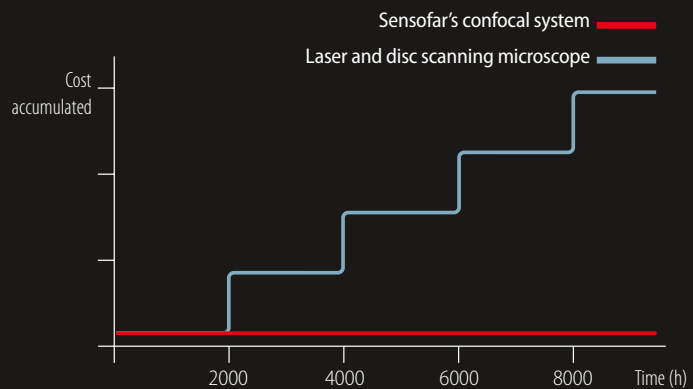

No maintenance

Alternative confocal microscopes use mirror scanning heads or a scanning disc approach. Both are moving mechanisms that can limit lifetime and that certainly degrade pixel dithering at high magnifications.


Sensofar's approach with a microdisplay has no moving parts, yielding a very stable system with unlimited lifetime and zero consumables.

Automated acquisition




3D auto function

This new feature vastly simplifies the data acquisition process. By placing the sample on the desired position, focusing it and selecting 3D auto function, the SensoSCAN software automatically determines the correct illumination (light) and the appropriate measurement range, and then performs the chosen measurement type. A quality result can thus be obtained within just a few seconds.

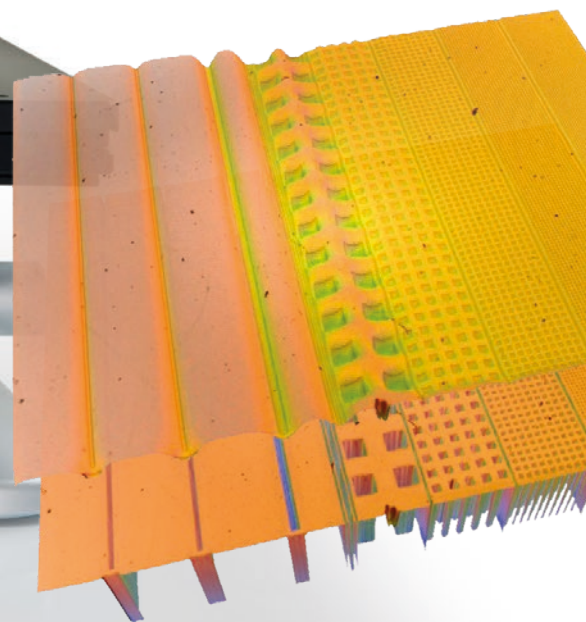

Live image options

SensoSCAN software now displays the confocal live image as you have never seen it before. Quality and speed have been improved to yield a frame rate of 9 fps (frames per second) for confocal images and 30 fps for bright field images. Together with the other live image options, samples viewing is now significantly more accessible and flexible.

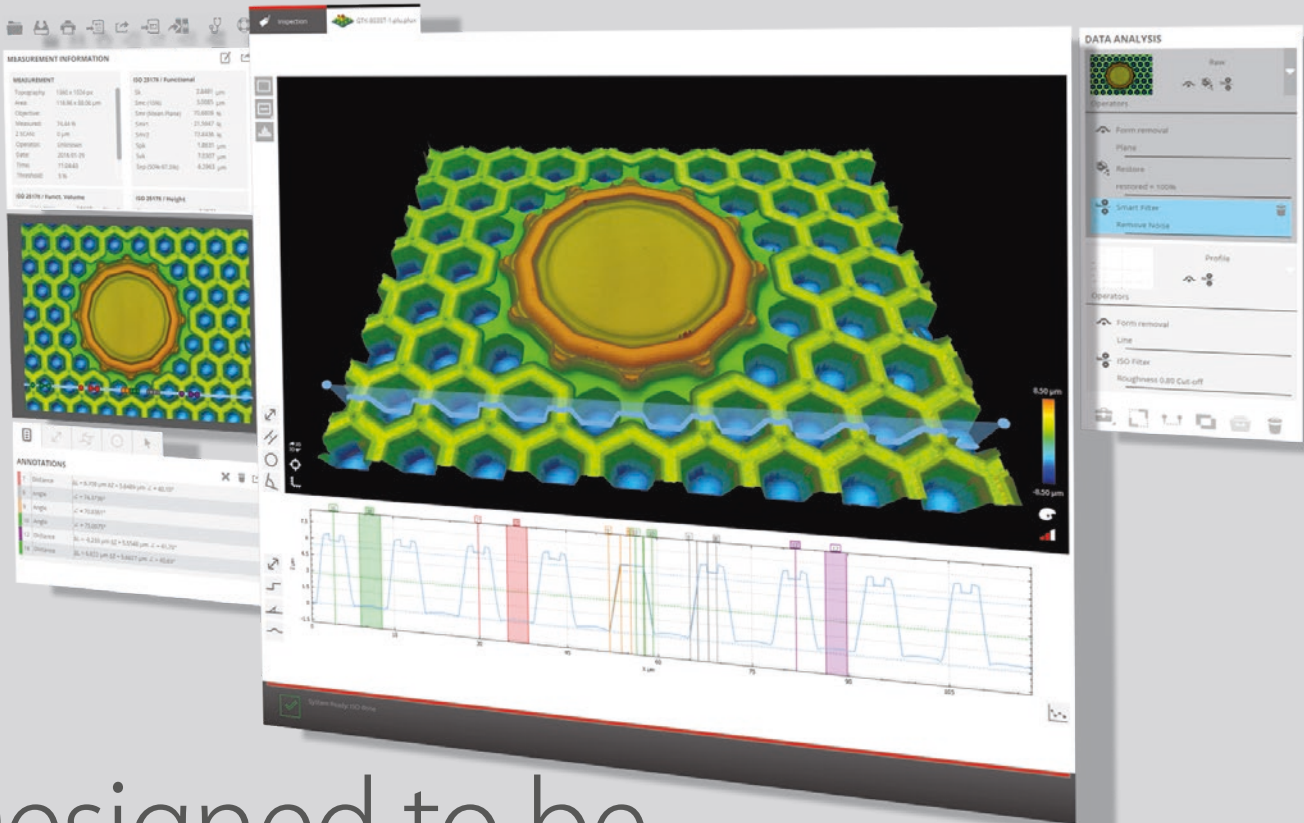

Designed to be simple and easy to use

Guided interface

When switching between measurement techniques (confocal, interferometric or focus variation), the system is automatically optimized and settings parameters are trimmed to those permissible for the chosen measurement type (image, 3D, thickness or profile). Visual distinction between the different measurement techniques is provided in SensoSCAN through the use of color schemes. At the same time, the user is guided through the interface by the use of an intuitive structure and descriptive icons.

Multiple powerful acquisition settings

Numerous acquisition parameters can be adapted to best suit the intended measurement. For example, various autofocus settings help to reduce the acquisition time, multilevel light strategies help improve the illumination of complex 3D structures and selectable Z-scan options also provide an opportunity to optimize the acquisition for varying 3D surfaces. All acquisition parameters can be saved as a template for re-use individually (SMR) or for repetitive measurements (MMR).




ISO parameters


SensoSCAN is compliant with ISO 25178. A complete selection of ISO 3D areal surface texture parameters is available: height, spatial, hybrid, functional and volumetric parameters.

2D and 3D surface texture parameters

MEASUREMENT INFORMATION	
MEASUREMENT	ISO 25178 / Functional
Topography: 1360 x 1024 µm	Sa 21.768 µm
Area: 877.20 x 640.68 µm	Sq (10%) 6.3981 µm
Objective: 84x 23x v4.5	Sqv (Mean Plane) 31.0401 µm
Measure: 100 %	Sms 1 4.2465 µm
Z SCAN: 57.0079 µm	Sms 2 0.4345 µm
Operator: Administrator	Spk 3.8001 µm
Date: 2016-01-28	Svk 6.4880 µm
Time: 18:02:04	Sxp (20% - 80%) 15.600 µm
Threshold: 1 %	
ISO 25178 / Funct. Value	ISO 25178 / Height
Vmc (10% - 90%) 7.4992 µm³/µm²	Sa 6.2087 µm
Vmp (10%) 6.2100 µm³/µm²	Sku 2.3682 µm
Vv (10%) 9.4876 µm³/µm²	Smsmax 0.0000 µm
Vv (10% - 90%) 9.4876 µm³/µm²	Sp 0.8119 µm
	Spl 0.0000 µm
	Sr 0.0000 µm
	Sr1 0.0000 µm
	Sr2 0.0000 µm
	Sr3 0.0000 µm
	Sr4 0.0000 µm
	Sr5 0.0000 µm
	Sr6 0.0000 µm
	Sr7 0.0000 µm
	Sr8 0.0000 µm
	Sr9 0.0000 µm
	Sr10 0.0000 µm
	Sr11 0.0000 µm
	Sr12 0.0000 µm
	Sr13 0.0000 µm
	Sr14 0.0000 µm
	Sr15 0.0000 µm
	Sr16 0.0000 µm
	Sr17 0.0000 µm
	Sr18 0.0000 µm
	Sr19 0.0000 µm
	Sr20 0.0000 µm
	Sr21 0.0000 µm
	Sr22 0.0000 µm
	Sr23 0.0000 µm
	Sr24 0.0000 µm
	Sr25 0.0000 µm
	Sr26 0.0000 µm
	Sr27 0.0000 µm
	Sr28 0.0000 µm
	Sr29 0.0000 µm
	Sr30 0.0000 µm
	Sr31 0.0000 µm
	Sr32 0.0000 µm
	Sr33 0.0000 µm
	Sr34 0.0000 µm
	Sr35 0.0000 µm
	Sr36 0.0000 µm
	Sr37 0.0000 µm
	Sr38 0.0000 µm
	Sr39 0.0000 µm
	Sr40 0.0000 µm
	Sr41 0.0000 µm
	Sr42 0.0000 µm
	Sr43 0.0000 µm
	Sr44 0.0000 µm
	Sr45 0.0000 µm
	Sr46 0.0000 µm
	Sr47 0.0000 µm
	Sr48 0.0000 µm
	Sr49 0.0000 µm
	Sr50 0.0000 µm
	Sr51 0.0000 µm
	Sr52 0.0000 µm
	Sr53 0.0000 µm
	Sr54 0.0000 µm
	Sr55 0.0000 µm
	Sr56 0.0000 µm
	Sr57 0.0000 µm
	Sr58 0.0000 µm
	Sr59 0.0000 µm
	Sr60 0.0000 µm
	Sr61 0.0000 µm
	Sr62 0.0000 µm
	Sr63 0.0000 µm
	Sr64 0.0000 µm
	Sr65 0.0000 µm
	Sr66 0.0000 µm
	Sr67 0.0000 µm
	Sr68 0.0000 µm
	Sr69 0.0000 µm
	Sr70 0.0000 µm
	Sr71 0.0000 µm
	Sr72 0.0000 µm
	Sr73 0.0000 µm
	Sr74 0.0000 µm
	Sr75 0.0000 µm
	Sr76 0.0000 µm
	Sr77 0.0000 µm
	Sr78 0.0000 µm
	Sr79 0.0000 µm
	Sr80 0.0000 µm
	Sr81 0.0000 µm
	Sr82 0.0000 µm
	Sr83 0.0000 µm
	Sr84 0.0000 µm
	Sr85 0.0000 µm
	Sr86 0.0000 µm
	Sr87 0.0000 µm
	Sr88 0.0000 µm
	Sr89 0.0000 µm
	Sr90 0.0000 µm
	Sr91 0.0000 µm
	Sr92 0.0000 µm
	Sr93 0.0000 µm
	Sr94 0.0000 µm
	Sr95 0.0000 µm
	Sr96 0.0000 µm
	Sr97 0.0000 µm
	Sr98 0.0000 µm
	Sr99 0.0000 µm
	Sr100 0.0000 µm

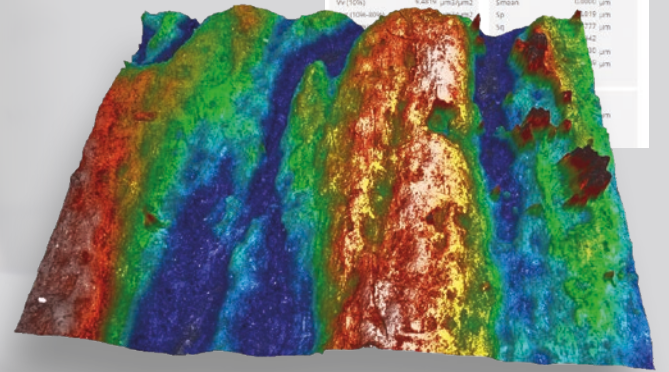

It is time to play...

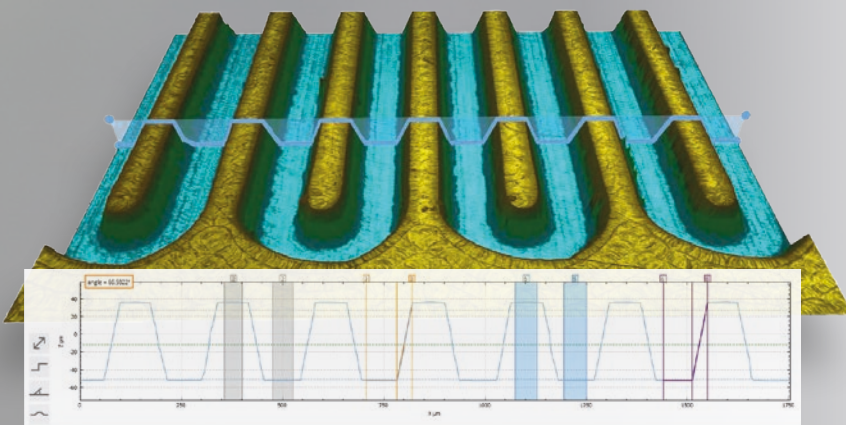


Step height and angle

Interactive analysis tools

3D and 2D interactive views provide multiple scaling, display and render options. A comprehensive suite of tools for preliminary examination and analysis of 3D or 2D measurements is provided. Dimensions, angles, distances, diameters can be measured and features highlighted with new critical dimensions tools. All of these features make the new SensoSCAN an ideal software package for a broad range of analysis tasks. For applications requiring a more complete analysis suite, advanced analysis software packages are optionally available, SensoMAP and SensoPRO LT.



... and get your results!

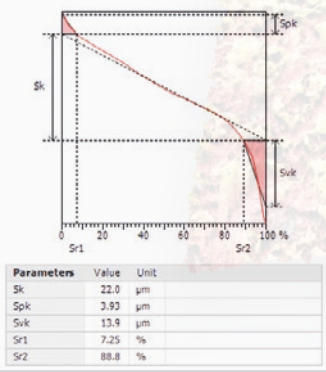

Tribology, lubrication and grinding parameters


Sequential operators

A comprehensive set of operators provides the opportunity to retouch data points, restore non-measurable data, remove form (plane, sphere, polynomial), apply a range of filters and/or generate alternative layers by cropping, subtracting or extracting a profile. It is also possible to create analysis templates to apply pre-determined filter and operator configurations to repeated measurements.

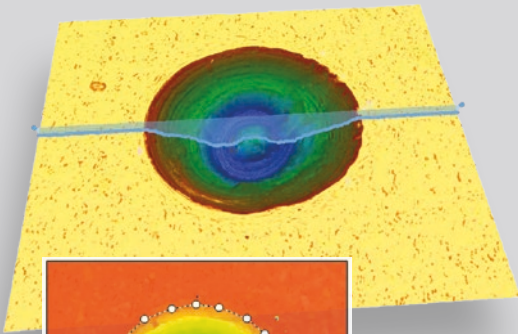



Volume

Parameters	Unit	Hole
Surface	µm²	64282
Volume	µm³	2850297
Max. depth/height	µm	106
Mean depth/height	µm	44.3

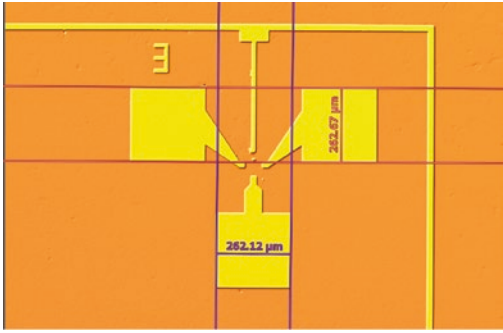

Analysis report

Obtain a clear and well-structured report for each measurement, showing the 3D data, a 2D profile and all the ISO parameters. SensoSCAN can also export data in to *.csv and *.dat, and graphics into *.png, *.tiff or *.jpg formats.

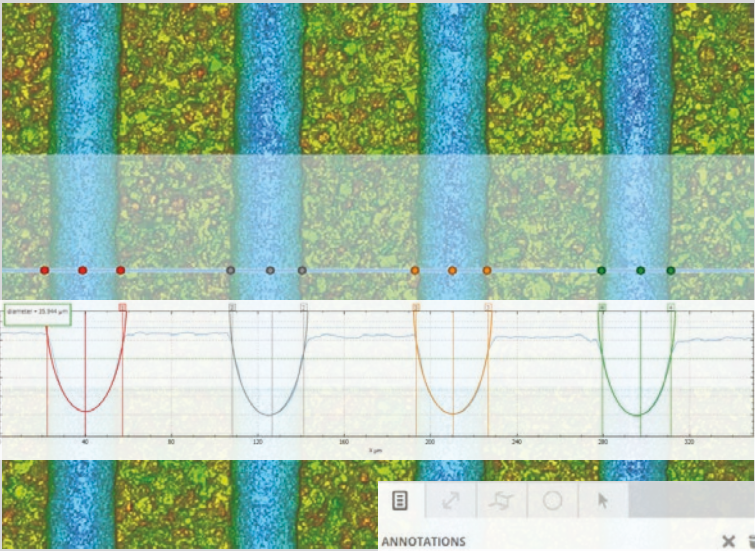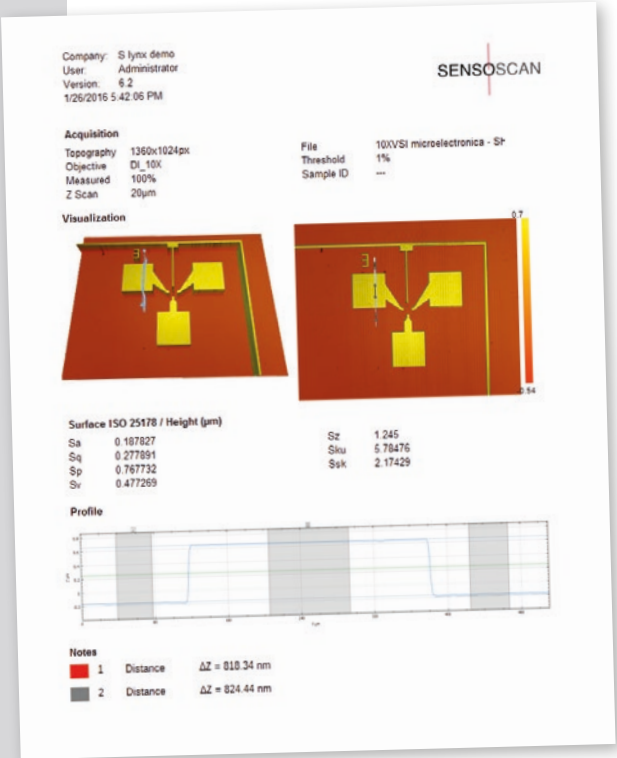

Form and contour

ANNOTATIONS	
1	Circle Dxy = 38.248 µm Axy = 1148.87 µm²
2	Circle Dxy = 38.262 µm Axy = 1038.44 µm²
3	Circle Dxy = 36.474 µm Axy = 1044.84 µm²
4	Circle Dxy = 35.944 µm Axy = 1014.71 µm²

Its incredibly compact design with integrated sensor head and controller results in a small footprint and makes for a robust, and reliable system that is easy to install. Vibration isolation pads give the system high stability - in most cases no vibration isolation table is needed.

Hardware

Large range of objectives

The S lynx uses premium CF60-2 Nikon objectives that exhibit the largest working distance for each NA. Over 30 objectives are available. Combined with an encoded nosepiece that recognizes a change of objective and switches software automatically.



Adaptable column

Sensofar has developed a 4-position column that allows up to 150 mm of height adjustment. Flexible options are designed to avoid restrictions between samples with differing heights.



Movement system

The S lynx positioning is composed of a motorized Z stage with 40 mm of travel range and high position accuracy, and a manual XY stage with 40 mm x 40 mm of travel range. A tip-tilt goniometer, resulting in a point of rotation that remains in focus, completes the movement system.



Objectives

Brightfield

Interferometric

MAG	2.5X	5X	10X	20X	50X	100X	150X	5X	10X	20X	50X	100X
NA	0.075	0.15	0.30	0.45	0.80	0.90	0.95	0.13	0.30	0.40	0.55	0.70
WD (mm)	6.5	23.5	17.5	4.5	1.0	1.0	0.2	9.3	7.4	4.7	3.4	2.0
FOV ¹ (µm)	7016x5280	3508x2640	1754x1320	877x660	351x264	175x132	117x88	3508x2640	1754x1320	877x660	351x264	175x132
Spatial sampling ² (µm)	5.16	2.58	1.29	0.65	0.26	0.13	0.09	2.58	1.29	0.65	0.26	0.13
Optical resolution ³ (µm)	2.23	1.11	0.55	0.37	0.21	0.18	0.17	2.58	1.29	0.65	0.25	0.20
Measurement time ⁴ (s)	>3s							>3s				

Confocal

VSI

Vertical resolution ⁵ (nm)	–	75	25	8	3	2	1	1				
Maximum slope ⁶ (°)	–	8	14	21	42	51	71	8	14	21	25	42

Focus variation

Min. measurable roughness	Sa > 10 nm
Maximum slope (°)	up to 86°


1 Maximum field of view with 2/3" camera and 0.5X optics. **2** Pixel size on the surface. **3** L&S: Line and Space, half of the diffraction limit according to the Rayleigh criterion. Values for white LED. Spatial sampling could limit the optical resolution for interferometric objectives. **4** For brightfield objectives, 21 scanning planes (confocal). **5** System noise measured as the difference between two consecutive measurements of a calibration mirror placed perpendicular to the optical axis. **6** On smooth surfaces, up to 86° on rough surfaces. Other objectives are available.

System specifications

Measurement array	1232 x 1028 pixels
LED light source	white (lifetime 40000 h)
XY travel range	40 mm x 40 mm (1.5" x 1.5")
XY stage	240 mm x 155 mm (9.4" x 6.1")
Manual goniometer	+/- 3°
Maximum sample weight	10 kg (22 lbs)
Sample height	up to 150 mm (6") (adaptable)
Z travel range	40 mm (1.6")
Z stage linearity	<0.5 µm/mm
Z stage resolution	2 nm
Max. vertical scanning range	Focus Variation 25 mm; Confocal 36 mm; VSI 7 mm
Step height repeatability	< 3 nm
Sample reflectivity	0.05 to 100 %
Display resolution	0.01 mm
Computer	Latest INTEL processor; 2560 x 1440 pixel resolution (27")
Operating system	Microsoft Windows 10, 64bit
System	Line Voltage 100-240 V AC; frequency 50/60 Hz single phase
Environment	Temperature 10-35°C; Humidity <80 % RH; Altitude <2000 m

Dimensions

Weight: 26 kg (57 lbs)

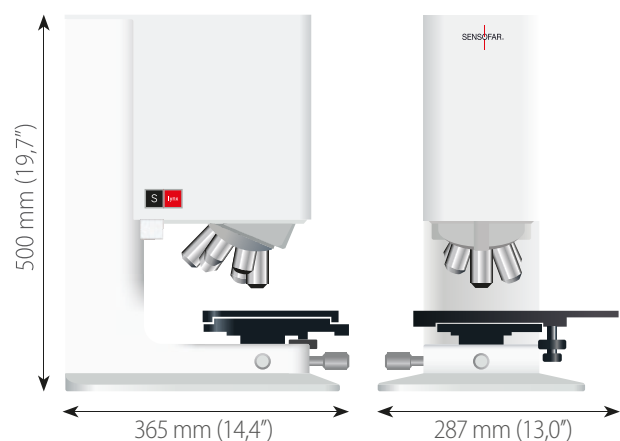

Software

User Management rights	Administrator, supervisor, advanced operator, operator
Acquisition technologies	Confocal, VSI and Focus Variation
Measurement types	Image, 3D, 3D thickness, profile and coordinates
Advanced Software Analysis	SensoMAP and SensoPRO (optional)



SENSOFAR is a leading-edge technology company that has the highest quality standards within the field of surface metrology

Sensofar Metrology provides high-accuracy optical profilers based on confocal, interferometry and focus variation techniques, from standard setups for R&D and quality inspection laboratories to complete non-contact metrology solutions for in-line production processes. Sensofar Group is headquartered in Barcelona, also known as a technology and innovation hub in Europe. The Group is represented in over 30 countries through a global network of partners and has its own offices in Asia, Germany and the United States.

HEADQUARTERS

SENSOFAR METROLOGY | BARCELONA (Spain) | T. +34 93 700 14 92 | info@sensofar.com

SALES OFFICES

SENSOFAR ASIA | Shanghai (China) | T. +86 021 51602735 | info.asia@sensofar.com

SENSOFAR GERMANY | Munich (Germany) | T. +49 151 14304168 | info.germany@sensofar.com

SENSOFAR USA | Newington (USA) | T. +1 617 678 4185 | info.usa@sensofar.com

sensofar.com



Brochure
in multiple
languages